

ETC Setup Guide

Eos Programming, Motorized, and Standard Fader Wings

Overview

This document outlines the setup of Eos Programming, Motorized, and Standard Fader Wings. For additional information, please refer to the Eos Ti, Eos, and Gio Operations Manual or the Ion Operations Manual, which can be downloaded from our website at www.etcconnect.com.



Note: *The wings require either Windows 7 or later, or Mac OS El Capitan (10.11) or later. The wings will not work with Windows XP consoles.*

The wings ship with the following:

- Power supply
- IEC power cord
- This setup guide
- Dust cover
- USB cord

Setup Instructions for All Wings

- 1: Attach the power supply to the power input.
- 2: Connect the standard fader wing to the host device via the USB Type B Connector. You will need to use a Type A to Type B USB cable (provided).
- 3: Connect any additional cables or accessories that are needed.
- 4: To power on the wing, a power input and a USB connection to a host device is required.

When first connected to a PC or Mac that has ETCnomad software installed, drivers will automatically install. After that installation, the wing will be ready to use.



Note: *It is recommended that the wing be connected before launching the console, ETCnomad software, or starting up a RPU or RVI.*



Note: *For information about controlling the brightness of the wing, please see the Setup chapter in your console's Operations Manual.*



Corporate Headquarters ■ Middleton, WI, USA ■ Tel +608 831 4116 ■ Service: (Americas) service@etcconnect.com

London, UK ■ Tel +44 (0)20 8896 1000 ■ Service: (UK) service@etceurope.com

Rome, IT ■ Tel +39 (06) 32 111 683 ■ Service: (UK) service@etceurope.com

Holzkirchen, DE ■ Tel +49 (80 24) 47 00-0 ■ Service: (DE) techserv-hoki@etcconnect.com

Hong Kong ■ Tel +852 2799 1220 ■ Service: (Asia) service@etcasia.com

Web: etcconnect.com ■ © 2017 Electronic Theatre Controls, Inc.

Product information and specifications subject to change. ETC intends this document to be provided in its entirety.

4240M2200 ■ Rev E ■ Released 2017-12


ETC Setup Guide

Eos Programming, Motorized, and Standard Fader Wings

Eos® Programming Wing Hardware


The Eos Programming Wing can be used with ETCnomad, ETCnomad Puck, Ion Xe RPU, RVI, Ion RPU, RPU3 and RVI3.

Rear Panel

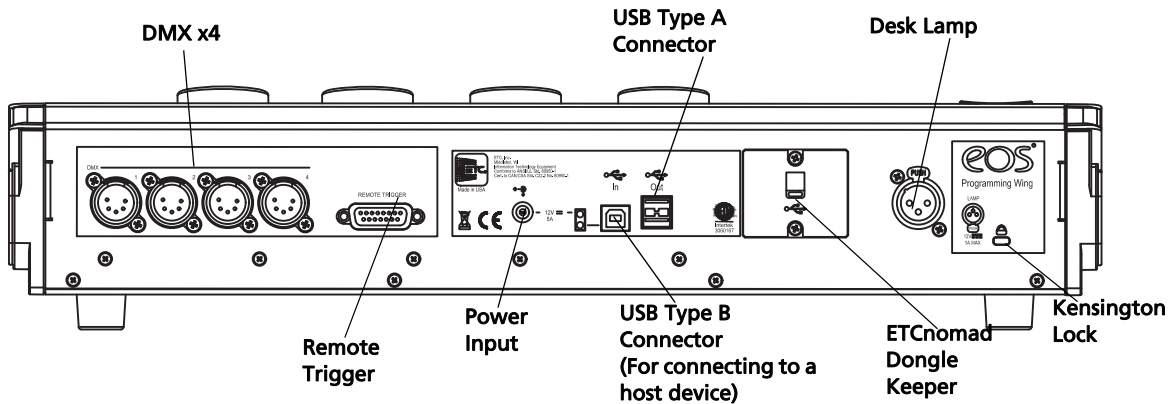

Note: *Screws are provided behind the hatch to attach an ETCnomad dongle serial number tag securely to the wing.*

Front Panel

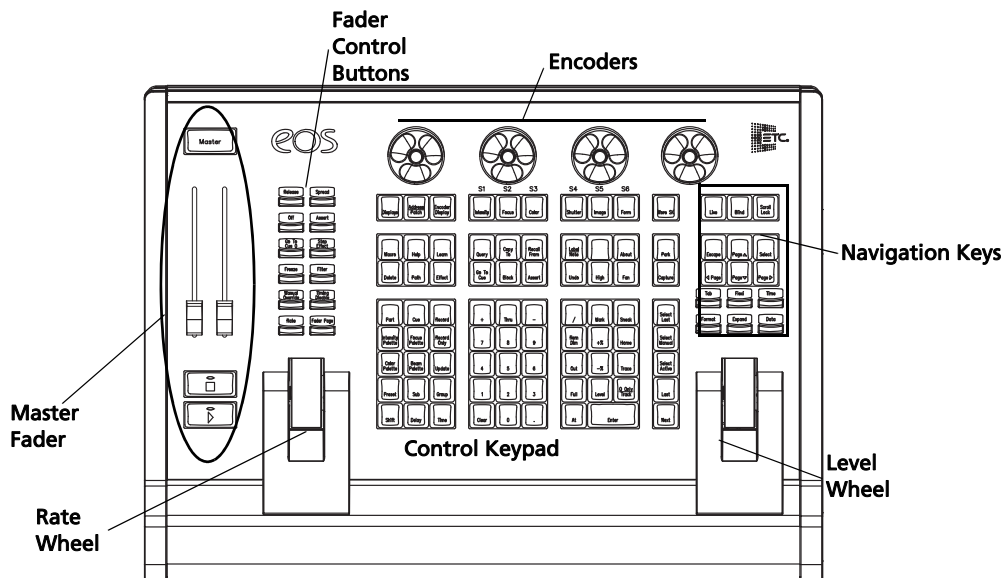

Programming Wing Settings

In the ECU>Settings>Local I/O, settings are available for the Eos Programming Wing. From this screen, you can configure the port address, enable local dimmer doubling, and set the port speed. Multiple devices will appear in separate boxes and can be identified by their serial numbers.



Note: *With a Programming Wing connected, you will need to go into the main Eos application first before the Programming Wing will display in the ECU.*

Also available on this screen are the Show Control settings for configuring the remote trigger and MIDI ports. Please see the Eos Family Show Control Setup Guide for more information.

ETC Setup Guide


Eos Programming, Motorized, and Standard Fader Wings

Eos Motorized Fader Wing Hardware

The Eos Motorized Fader Wing can be used with Eos Ti, Gio, Gio @ 5, Ion Xe, Ion Xe RPU, Ion, Ion RPU, RVI, RVI3, RPU3, ETCnomad, ETCnomad Puck. The Eos Motorized Fader Wing is only compatible with the Windows 7 Eos Family consoles listed.


Note: *Up to three Eos Motorized and/or Fader Wings can be connected to any host device.*

Rear Panel

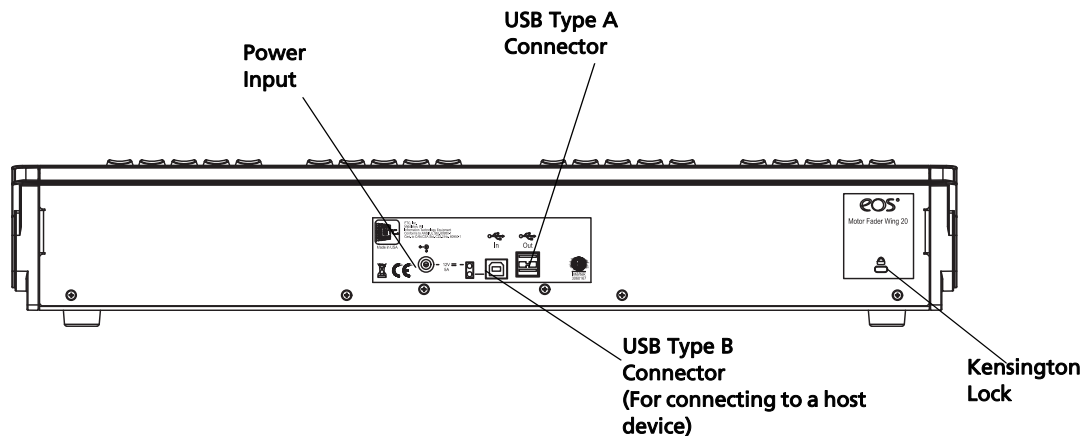


Front Panel

Eos 20 Motorized Fader Wing

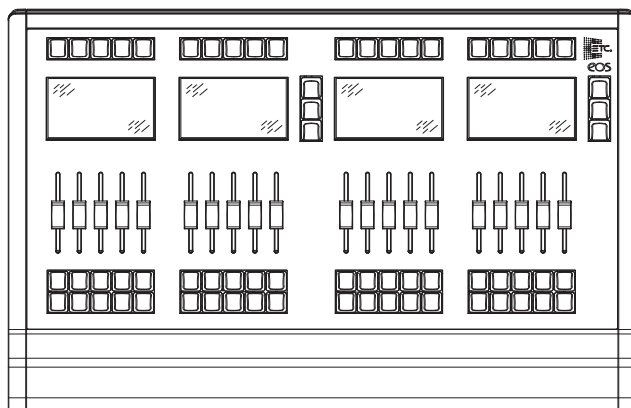

Eos 10 Motorized Fader Wing

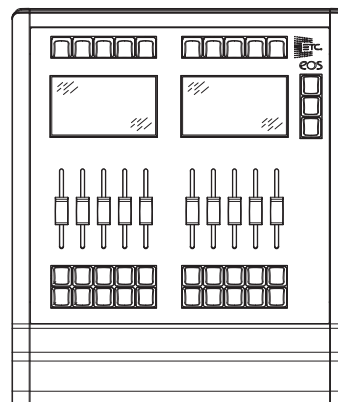

ETC Setup Guide


Eos Programming, Motorized, and Standard Fader Wings

Eos Fader Wing Hardware

The Eos Fader Wing can be used with Eos Ti, Gio, Gio @ 5, Ion Xe, Ion Xe RPU, Ion, Ion RPU, RVI, RVI3, RPU3, ETCnomad, and ETCnomad Puck. .


Note: *Up to three Eos Motorized and/or Fader Wings can be connected to any host device.*

Rear Panel

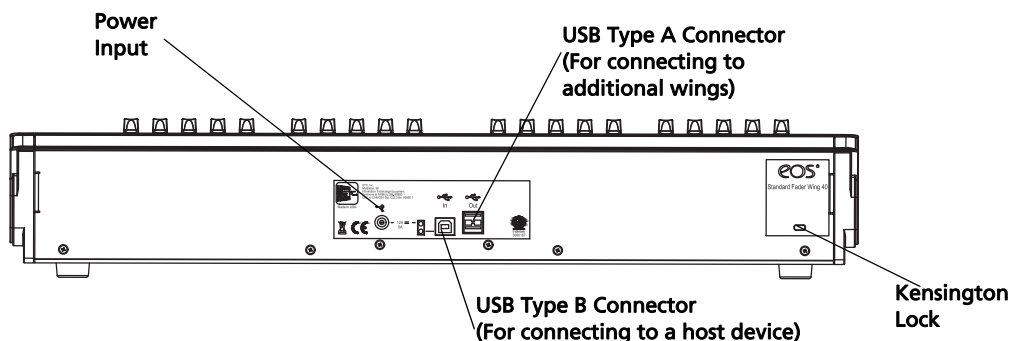

Front Panel

Fader Wing 40

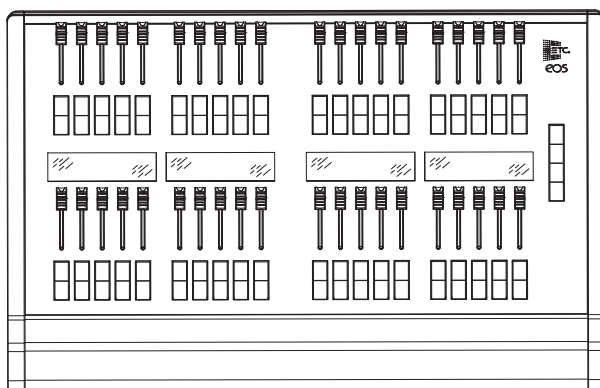

Fader Wing 20

